

Series TMCU, TMVU, TMCU flow control valves

Unidirectional and bidirectional flow control valves

Banjo flow controllers nominal diameters $\varnothing$ 2 - 3,8 - 5,8 - 8 mm

Ports G1/8, G1/4, G3/8, G1/2



Series TMCU, TMVU, TMCU unidirectional and bidirectional flow controllers have been revised in order to decrease their dimensions and improve their flow rate characteristics. Their construction allows for easy assembly to cylinders and valves and allows the regulation adjustment to be precise and gradual.

GENERAL DATA

Construction	needle - type
Valve group	unidirectional and bidirectional controller
Materials	brass - technopolymer - NBR
Mounting	by male threaded
Threaded ports	G1/8 - G1/4 - G3/8 - G1/2
Installation	in any position
Operating temperature	0°C ÷ 60°C (with dry air -20°C)
Operating pressure	0,5 ÷ 10 bar
Nominal pressure	6 bar
Nominal flow	see graph
Nominal dia.	Tube 4 $\varnothing$ 2 - Tube 6 $\varnothing$ 3,8 - Tube 8 $\varnothing$ 5,8 - Tube 10 and 12 $\varnothing$ 8
Fluid	filtered air If lubricated air is used, it is recommended to use ISOVG 32 oil. Once applied the lubrication should never be interrupted.


CODING EXAMPLE

TM	CU	9	74	-	1/8	-	6
----	----	---	----	---	-----	---	---

TM	ACTUATION: TM = manual						
CU	ASSEMBLY: CU = on cylinders unidirectional VU = on valves unidirectional CO = bidirectional						
9	VERSIONS: 9 = manual needle						
74	REGULATION: step - ø tube 72 = 2 4 74 = 3.8 6 76 = 5.8 8 78 = 8 10						
1/8	PORTS: 1/8 1/4 3/8 1/2						
6	Ø TUBE: 4 6 8 10						


To ensure the right choice of unidirectional flow controller, proceed as follows: calculate the quantity of air in NI/min (see cylinder Table); determine the stroke time of the cylinder; refer to graph to see which controller is the right type.

UNIDIRECTIONAL AND BIDIRECTIONAL FLOW CONTROL REGULATORS

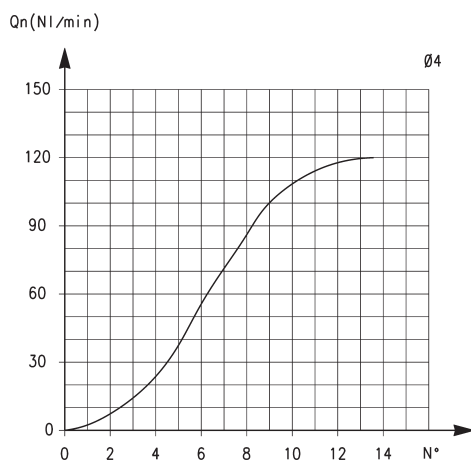

TUBE Ø4


Flow Q_n (NI/min.) from 2 → 1 with controller OPEN: 400
Flow Q_n (NI/min.) from 2 → 1 with controller CLOSED: 280
 Q_n is determined with a supply pressure of 6 bar and with $\Delta P = 1$ bar at the outlet
 N° = number of screw turns.

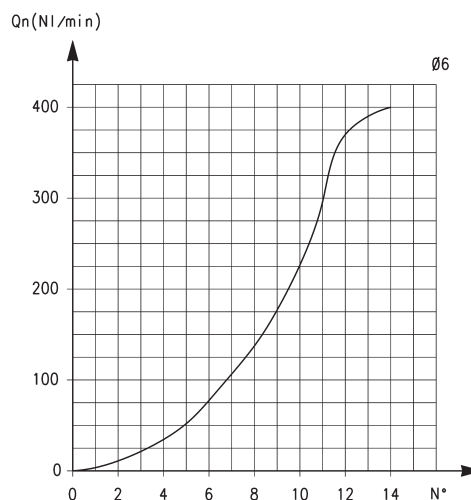

TUBE Ø6


Flow Q_n (NI/min.) from 2 → 1 with controller OPEN: 550
Flow Q_n (NI/min.) from 2 → 1 with controller CLOSED: 280
 Q_n is determined with a supply pressure of 6 bar and with $\Delta P = 1$ bar at the outlet
 N° = number of screw turns.

UNIDIRECTIONAL AND BIDIRECTIONAL FLOW CONTROL REGULATORS

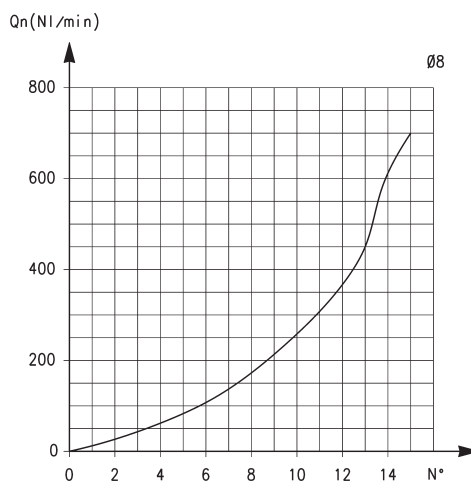

TUBE Ø8

Flow Q_n (NI/min.) from 2 → 1 with controller OPEN: 890
Flow Q_n (NI/min.) from 2 → 1 with controller CLOSED: 460
 Q_n is determined with a supply pressure of 6 bar and with $\Delta P = 1$ bar at the outlet
 N° = number of screw turns.

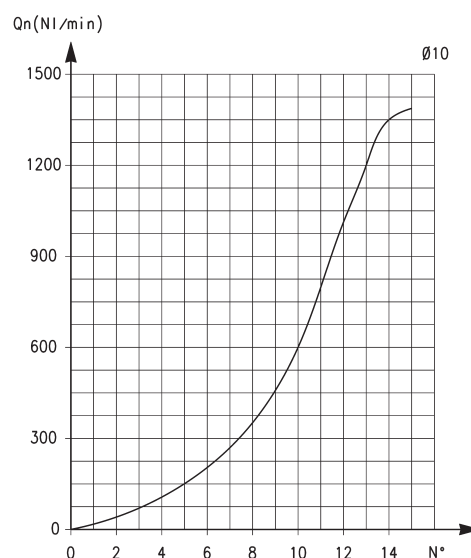

TUBE Ø10

Flow Q_n (NI/min.) from 2 → 1 with controller OPEN: Ø 10-1200/Ø12-1250
Flow Q_n (NI/min.) from 2 → 1 with controller CLOSED: Ø 10-600/Ø12-600
 Q_n is determined with a supply pressure of 6 bar and with $\Delta P = 1$ bar at the outlet
 N° = number of screw turns.


Series TMCU valves

Unidirectional flow controller for mounting on single-acting or double-acting cylinders.
Adjustment of setting by a hexagonal male key or a manually operated knurled screw.
Ports: G1/8, G1/4, G3/8, G1/2



DIMENSIONS

Mod.	A	B	F	H	L	M	S	SW	SW1	Z
TMCU 972-1/8-4	G1/8	4	11,5	5	43	21,5	16,5	16	1,5	50
TMCU 974-1/8-6	G1/8	6	11,5	5	43	21,5	16,5	16	1,5	50
TMCU 974-1/4-6	G1/4	6	11,5	6	44	21,5	16,5	17	1,5	51
TMCU 976-1/8-8	G1/8	8	13,5	5	47	25	17,5	19	2,5	54
TMCU 976-1/4-8	G1/4	8	13,5	6	48,5	25	18	19	2,5	55,5
TMCU 976-3/8-8	G3/8	8	13,5	7	49,5	25	18	20	2,5	56,5
TMCU 978-3/8-10	G3/8	10	16	7	51	29	17	25	2,5	59,5
TMCU 978-1/2-10	G1/2	10	16	8	52	29	17	25	2,5	60,5

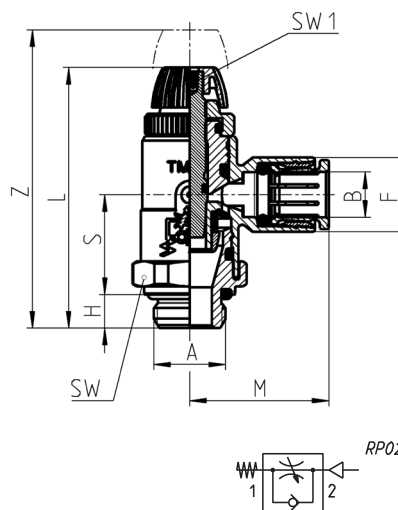


Series TMVU valves

Unidirectional flow controller for mounting on valves.
Adjustment of setting by a hexagonal male key or a manually operated knurled screw.
Ports: G1/8, G1/4, G3/8, G1/2



DIMENSIONS

Mod.	A	B	F	H	L	M	S	SW	SW1	Z
TMVU 972-1/8-4	G1/8	4	11,5	5	43	21,5	16,5	16	1,5	50
TMVU 974-1/8-6	G1/8	6	11,5	5	43	21,5	16,5	16	1,5	50
TMVU 974-1/4-6	G1/4	6	11,5	6	44	21,5	16,5	17	1,5	51
TMVU 976-1/8-8	G1/8	8	13,5	5	47	25	17,5	19	2,5	54
TMVU 976-1/4-8	G1/4	8	13,5	6	48,5	25	18	19	2,5	55,5
TMVU 976-3/8-8	G3/8	8	13,5	7	49,5	25	18	20	2,5	56,5
TMVU 978-3/8-10	G3/8	10	16	7	51	29	17	25	2,5	59,5
TMVU 978-1/2-10	G1/2	10	18	8	52	29	17	25	2,5	60,5

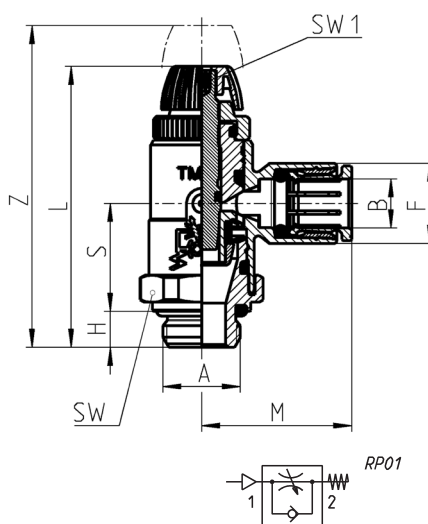

Series TMCU valves

Bidirectional flow controller.
Adjustment of setting by a hexagonal male key or a manually operated knurled screw.
Ports: G1/8, G1/4, G3/8, G1/2



DIMENSIONS

Mod.	A	B	F	H	L	M	S	SW	SW1	Z
TMCU 972-1/8-4	G1/8	4	11,5	5	43	21,5	16,5	16	1,5	50
TMCU 974-1/8-6	G1/8	6	11,5	5	43	21,5	16,5	16	1,5	50
TMCU 974-1/4-6	G1/4	6	11,5	6	44	21,5	16,5	17	1,5	51
TMCU 976-1/8-8	G1/8	8	13,5	5	47	25	17,5	19	2,5	54
TMCU 976-1/4-8	G1/4	8	13,5	6	48,5	25	18	19	2,5	55,5
TMCU 976-3/8-8	G3/8	8	13,5	7	49,5	25	18	20	2,5	56,5
TMCU 978-3/8-10	G3/8	10	16	7	51	29	17	25	2,5	59,5
TMCU 978-1/2-10	G1/2	10	16	8	52	29	17	25	2,5	60,5

